

# SF O-RING V

Кръгло уплътнение, 90SH FKM (FPM)

**HANSA FLEX**


## Свойства

Конструкция правоъгълна форма

Температура min. -15 °C

Температура max. 200 °C

Материал FKM SH 90 ( Viton )

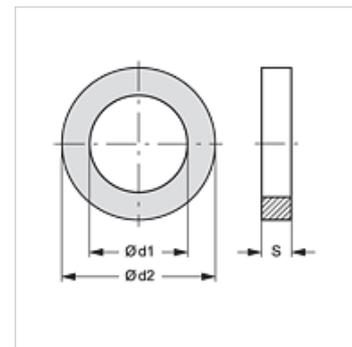

## Артикул

| Обозначение   | DN* | Мярка | Цол    | Ø d1<br>(mm) | Ø d2<br>(mm) | S<br>(mm) |
|---------------|-----|-------|--------|--------------|--------------|-----------|
| SF ORING 13 V | 12  | 8     | 1/2"   | 18,66        | 25,72        | 3,53      |
| SF ORING 20 V | 19  | 12    | 3/4"   | 24,99        | 32,05        | 3,53      |
| SF ORING 25 V | 25  | 16    | 1"     | 32,92        | 39,98        | 3,53      |
| SF ORING 32 V | 31  | 20    | 1.1/4" | 37,70        | 44,76        | 3,53      |
| SF ORING 40 V | 38  | 24    | 1.1/2" | 47,22        | 54,28        | 3,53      |
| SF ORING 50 V | 51  | 32    | 2"     | 56,74        | 63,80        | 3,53      |
| SF ORING 60 V | 60  | 40    | 2.1/2" | 69,45        | 76,51        | 3,53      |
| SF ORING 75 V | 76  | 48    | 3"     | 85,32        | 92,38        | 3,53      |

## Варианти на продукта

SF O-RING PU