


K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

HANSA FLEX

Свойства

| | |
|-----------------------|-----------------------------|
| Работно налягане | max. 18 bar |
| Температурен диапазон | 0 °C to +60 °C |
| допуск налягане | ± 0.3 bar at 10 l/min |
| корпус | Zinc |
| останалите части | Brass, NBR, stainless steel |

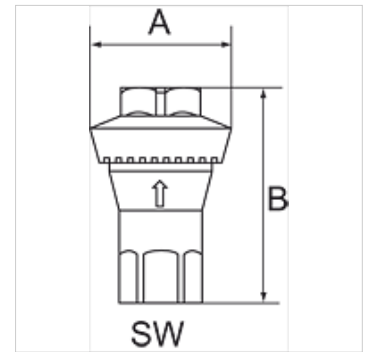

Указание

Други данни при запитване.

Описание

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

Артикул

| Обозначение | Резба | работно налягане предварително настроено | A (mm) | B | SW (mm) |
|----------------|-------|--|-----------|---------|------------|
| K- 07 25 02 75 | G 1/4 | 1 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 76 | G 1/4 | 2 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 77 | G 1/4 | 3 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 78 | G 1/4 | 4 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 79 | G 1/4 | 5 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 80 | G 1/4 | 6 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 81 | G 1/4 | 6,5 bar | 34,0 | 52,0 mm | 17 |
| K- 07 25 02 82 | G 1/4 | 7 bar | 34,0 | 52,0 mm | 17 |