

# K-KOMPAKTEJEKTOREN MINI


Mini-compact ejectors

**HANSA FLEX**

## Свойства

|          |   |
|----------|---|
| Свойства | Vacuum generator with integrated control valves and system monitoring functions<br>Gripping and blowing off can be controlled without the need for external valves<br>Optimised air consumption thanks to many models with differing suction capacities<br>Minimum energy costs in continuous operation<br>Easy adjustment with foil keypad, LED display of the settings<br>Minimum size and low weight<br>Optimum vacuum generation directly on the suction pad<br>Complete solution for very simple installation<br>Short learning curve thanks to "teach" function<br>No need for additional sensors<br>Easily visible status indication |
|----------|---|

|                      |  |
|----------------------|--|
| Приложение           | Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes<br>pick-and-place systems |
| степен на евакуиране | 85 %   |
| основен корпус       | Anodised aluminium   |
| интегрирано          | NC blow-off valve, filter, silencer, non-return valve  |

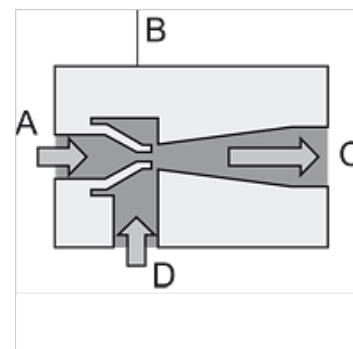

## Указание

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.  
Други данни при запитване.

## Описание

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Допълнителна информация

Important: Order two connection plugs per ejector.

## Артикул

| Обозначение    | размер на дюза | засмукващ клапан положение на покой | извод за въздух под налягане | вакуумно съединение | разход на въздух засмукване (L/min) | макс. капацитет на засмукване (L/min) | Размер              | Работно налягане (bar) |
|----------------|----------------|-------------------------------------|------------------------------|---------------------|-------------------------------------|---------------------------------------|---------------------|------------------------|
| K- 07 45 01 46 | 1,0            | NC                                  | M 5 IG                       | M5 female           | 46,0                                | 23,0                                  | 65mm x 10mm x 107mm | 4,5                    |
| K- 07 45 01 45 | 1,0            | NO                                  | M 5 IG                       | M5 female           | 46,0                                | 23,0                                  | 65mm x 10mm x 107mm | 4,5                    |

## Принадлежности

|                             |                                     |
|-----------------------------|-------------------------------------|
| K-ANSCHLUSSSTECK MAGNETVE 1 | Connection plug for solenoid valves |
| K-ERSATZSCHALLDAEMPFER      | Replacement silencers               |
| K-ERSATZFILTERELEMENTE 1    | Replacement filter element          |