


# K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

**HANSA FLEX**

## Свойства

Конструкция	PNP
съединение измервателна среда	G 1/8 male and M 5 female
хистерезис	Adjustable: 3 to 25% of set value
Температурен диапазон	0 - 50 °C
Течности	Non-aggressive gases. dry, oil-free air
корпус	Polycarbonate
изходящ сигнал	Analogue: 1 to 5 V
електрическо съединение	Male connector M8, four pin
капацитет на включване	125 mA
разход на електроенергия	30 mA
индикация за състоянието	LED

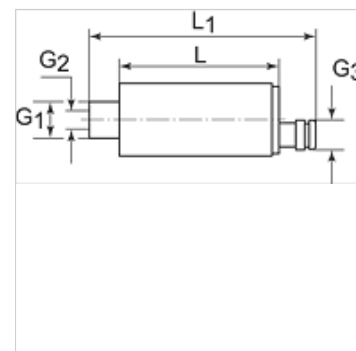

## Указание

Други данни при запитване.

## Описание

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

## Артикул

Обозначение	G1 външно	G2 вътрешно	G3 външно	L (mm)	L1 (mm)	Диапазон на измерване	Напрежение
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC