


# K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

**HANSA FLEX**

## Свойства

|                               |   |
|-------------------------------|---|
| Конструкция                   | PNP                                     |
| съединение измервателна среда | G 1/8 male and M 5 female               |
| хистерезис                    | Adjustable: 3 to 25% of set value       |
| Температурен диапазон         | 0 - 50 °C                               |
| Течности                      | Non-aggressive gases. dry, oil-free air |
| корпус                        | Polycarbonate                           |
| изходящ сигнал                | Analogue: 1 to 5 V                      |
| електрическо съединение       | Male connector M8, four pin             |
| капацитет на включване        | 125 mA                                  |
| разход на електроенергия      | 30 mA                                   |
| индикация за състоянието      | LED                                     |

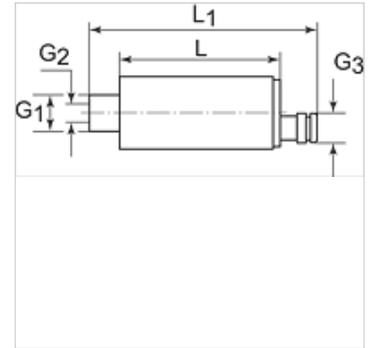

## Указание

Други данни при запитване.

## Описание

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

## Артикул

| Обозначение    | G1 външно | G2 вътрешно | G3 външно | L (mm) | L1 (mm) | Диапазон на измерване | Напрежение     |
|----------------|-----------|-------------|-----------|--------|---------|-----------------------|----------------|
| K- 07 45 01 31 | G 1/8     | M 5         | M 8 x 1   | 44,0   | 62,0    | -1 bis +10 bar        | 10.8 - 30 V DC |