


# K-BKR STAN DOP VA

## Stainless steel ball valves, double-acting actuator

### Свойства

<b>Конструкция</b>	Pneumatic actuators, in double- or single acting version, with integrated end-position feedback
<b>Работно налягане</b>	max. 63 bar (depending on temperature and nominal size)
<b>работна температура</b>	-20 °C to +70°C
<b>ъгъл на завъртане</b>	90 °
<b>стандартни места на срез</b>	Interface actuator / valve: four or eight threaded holes in the drive housing according to EN ISO 5211, Interface actuator / S
<b>налягане на управление</b>	5.5 bar
<b>клапанен адаптер</b>	Acc. to NAMUR
<b>задвижване</b>	aluminium eloxed
<b>уплътнение на задвижване</b>	NBR
<b>сферичен кран</b>	Stainless steel 1.4401, with ISO-flange plate
<b>уплътнение сферичен кран</b>	PTFE

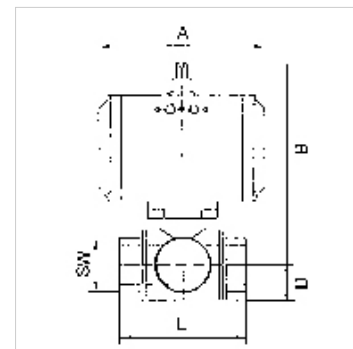

### Указание

Други данни при запитване.

### Описание

2-way cock, 3-piece, full bore

### Артикул

Обозначение	DN	Резба	A (mm)	B (mm)	D (mm)	L (mm)	SW (mm)
K- 07 30 02 42	15	Rp 1/2	133,0	144,0	24,0	75,0	29
K- 07 30 02 43	15	Rp 1/2	116,0	135,0	24,0	75,0	29
K- 07 30 02 44	20	Rp 3/4	133,0	148,0	27,0	80,0	35
K- 07 30 02 45	20	Rp 3/4	116,0	139,0	27,0	80,0	35
K- 07 30 02 46	25	Rp 1	133,0	157,0	30,0	90,0	41
K- 07 30 02 47	32	Rp 1 1/4	137,0	176,0	37,0	110,0	50
K- 07 30 02 48	40	Rp 1 1/2	137,0	186,0	40,0	120,0	58
K- 07 30 02 49	50	Rp 2	161,0	207,0	50,0	140,0	74
K- 07 30 02 50	65	Rp 2 1/2	180,0	238,0	60,0	185,0	89
K- 07 30 02 51	80	Rp 3	209,0	257,0	82,0	205,0	104