


K-MV O D 230 V, 50 - 60 HZ 1

Normally open, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Свойства

електрическо съединение	ISO 4400. cable socket (Pg 11P)
вид защита	IP65 (with connector socket fitted)
температура на средата	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
резба описание	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
корпус, гнездо на клапан	Brass
вътрешни части	Stainless steel
уплътнение	Perbunan (NBR) or FKM

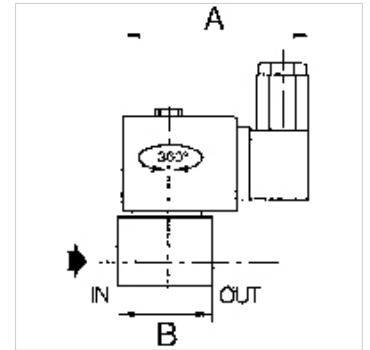

Указание

Други данни при запитване.

Описание

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Артикул

Обозначение	Резба	макс. работно налягане (bar)	NW	уплътняващ материал	A (mm)	B (mm)	модификация
K- 07 30 23 62	Rp 1/8	20	2,4	NBR	75,0	33,0	7
K- 07 30 23 64	Rp 1/8	20	2,4	FKM	75,0	33,0	1
K- 07 30 23 63	G 1/4	9	3,2	NBR	80,0	40,0	2
K- 07 30 23 65	G 1/4	9	3,2	FKM	80,0	40,0	2