


# K-SCHALLDAE SINTERBR S

Silencers, sintered bronze, slotted

**HANSA FLEX**

## Свойства

|                     |                                   |
|---------------------|-----------------------------------|
| Работно налягане    | макс. 10 bar                      |
| работна температура | -10 °C to +250 °C                 |
| Стандарт            | G thread acc. to DIN EN ISO 228-1 |

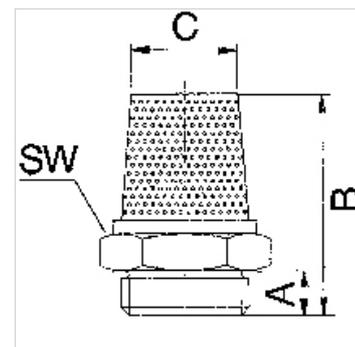

## Указание

Други данни при запитване.

## Описание

For reducing the exhaust noise generated by pneumatic equipment.

## Артикул

| Обозначение    | Резба | A<br>(mm) | B<br>(mm) | C<br>(mm) |
|----------------|-------|-----------|-----------|-----------|
| K- 07 40 35 03 | G 1/8 | 6,5       | 12,5      | 9,5       |
| K- 07 40 35 04 | G 1/4 | 6,5       | 13,5      | 12,6      |
| K- 07 40 35 05 | G 3/8 | 7,5       | 16,0      | 16,2      |
| K- 07 40 35 06 | G 1/2 | 10,0      | 19,6      | 20,5      |
| K- 07 40 46 86 | G 3/4 | 11,0      | 23,0      | 26,0      |
| K- 07 40 46 87 | G 1   | 13,0      | 24,0      | 33,0      |