


K-VERBINDER POM

Unions

HANSA FLEX

Свойства

| | |
|---------------------|---|
| работно налягане | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| работна температура | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Материал | Acetalpolymerisat (POM) |
| уплътняващ материал | NBR |

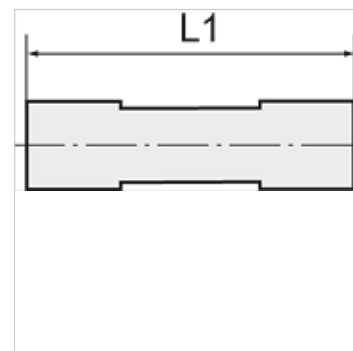

Указание

Други данни при запитване.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

| Обозначение | за външен Ø на маркуча | L1 (mm) |
|----------------|------------------------|------------|
| K- 07 40 28 41 | 4 mm | 33,6 |
| K- 07 40 28 42 | 5 mm | 34,6 |
| K- 07 40 28 43 | 6 mm | 36,9 |
| K- 07 40 28 44 | 8 mm | 40,0 |
| K- 07 40 28 45 | 10 mm | 43,9 |
| K- 07 40 28 46 | 12 mm | 55,8 |
| K- 07 40 28 47 | 15 mm | 62,0 |
| K- 07 40 28 48 | 18 mm | 66,5 |
| K- 07 40 28 49 | 22 mm | 72,2 |
| K- 07 40 28 50 | 28 mm | 95,6 |