



K-VERBINDER 1

Unions

HANSA FLEX

Свойства

работно налягане	Max. 18 bar
уплътняващ материал	Buna-N
Материал	месинг никелиран

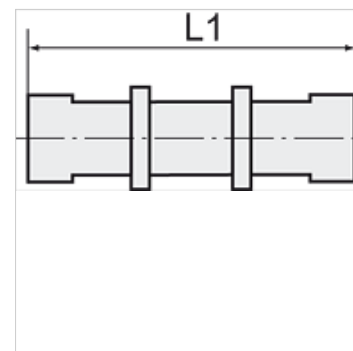

Указание

Други данни при запитване.

Артикул

Обозначение	за маркуч	L1 (mm)	SW
K- 07 40 30 92	4 mm / 2 mm	41,0	10 mm
K- 07 40 30 93	5 mm / 3 mm	28,5	8 mm
K- 07 40 30 94	6 mm / 4 mm	33,0	12 mm
K- 07 40 30 95	8 mm / 6 mm	33,0	12 mm
K- 07 40 30 90	10 mm / 8 mm	37,0	14 mm
K- 07 40 30 91	12 mm / 10 mm	42,0	17 mm