



K-XVM ZYL 2

Male connectors, parallel male thread

HANSA FLEX

Свойства

макс. работно налягане	18 bar
използвани маркучи	PA, PE, PU
Материал	месинг никелиран

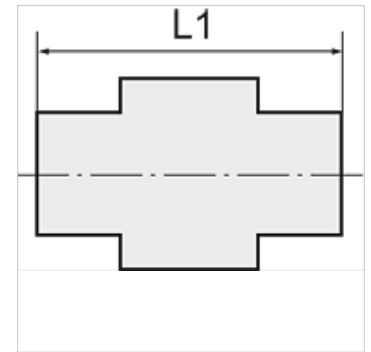

Указание

Други данни при запитване.

Артикул

Обозначение	Резба	за маркуч	L1 (mm)	SW
K- 07 40 33 54	M 5	5 mm / 3 mm	21,0	8 mm
K- 07 40 33 55	M 5	6 mm / 4 mm	21,0	8 mm
K- 07 40 33 60	G 1/8	5 mm / 3 mm	23,0	14 mm
K- 07 40 33 61	G 1/8	6 mm / 4 mm	25,5	13 mm
K- 07 40 33 62	G 1/8	8 mm / 6 mm	25,5	14 mm
K- 07 40 33 59	G 1/8	10 mm / 8 mm	27,5	14 mm
K- 07 40 33 57	G 1/4	6 mm / 4 mm	28,0	16 mm
K- 07 40 33 58	G 1/4	8 mm / 6 mm	28,0	16 mm
K- 07 40 33 56	G 1/4	10 mm / 8 mm	29,5	16 mm
K- 07 40 33 65	G 3/8	6 mm / 4 mm	29,0	19 mm
K- 07 40 33 66	G 3/8	8 mm / 6 mm	29,0	19 mm
K- 07 40 33 63	G 3/8	10 mm / 8 mm	30,5	19 mm
K- 07 40 33 64	G 3/8	12 mm / 10 mm	32,0	19 mm