


K-NEBELOEL METALLBEHAELER S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA FLEX

Свойства

входящо налягане	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
температура на средата	max. 60 °C
околна температура	Max. 60 °C
уплътняващ материал	NBR
корпус	Die-cast zinc, Aluminium for G 1 variant
наставка прокапване	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Manual
вид масло	CL 32 acc. to DIN 51517 - ISO VG 32
измерване на стойността на протичане	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

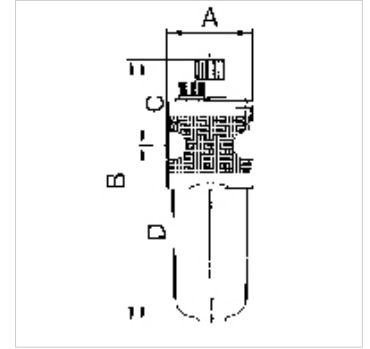

Указание

Други данни при запитване.

Описание

Proportional lubricators, oil can be filled under pressure.

Артикул

Обозначение	Резба	протичане (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Конструктивен размер
K- 07 25 00 92	G 1/4	1900	47,8	181,3 mm	71,3	110,0	6	1
K- 07 25 00 95	G 3/8	1900	47,8	181,3 mm	71,3	110,0	10	1
K- 07 25 00 98	G 1/2	5000	68,8	213,0 mm	79,3	133,7	15	2
K- 07 25 01 01	G 3/4	5000	68,8	213,0 mm	79,3	133,7	20	2
K- 07 25 01 04	G 1	18000	100,0	322,9 mm	82,7	240,2	25	3

Резервни части

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal