

K-HS RD

Unidirectional banjo valves, pneumatic release, port 2 with female thread

HANSA**FLEX**

Свойства

работно налягане 0.3 - 10 bar


налягане на управление 0.5 - 2.5 bar, depending on operating pressure

температура на средата max. 60 °C

Монтажно положение Any. The ring piece must be positioned before the valve is tightened

Материал месинг никелиран

упътняващ материал Perbunan

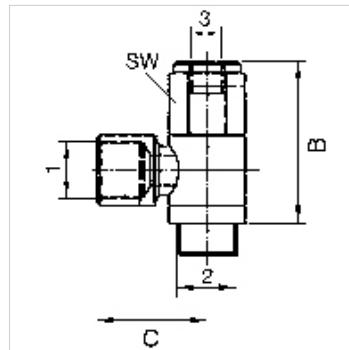

Указание

Други данни при запитване.

Описание

For stopping and positioning the cylinder movement: If a control signal is present at port 3 (see drawing), air can flow to and from the cylinder. If no control signal is present, the cylinder exhaust air is shut off by the unidirectional valve.
The cylinder is stopped. Releasable unidirectional valves are screwed directly onto the cylinder instead of the normal pipe connections.

Артикул

Обозначение	Port 1	Port 2	Съединение 3	B (mm)	C (mm)
K-07 15 07 04	G 1/8	G 1/8	M 5	38,0	21,5
K-07 15 07 03	G 1/4	G 1/4	G 1/8	43,0	25,4
K-07 15 07 05	G 3/8	G 3/8	G 1/8	46,0	31,6
K-07 15 07 02	G 1/2	G 1/2	G 1/8	52,0	32,0