


K-KURZH ZYL EINFACHW

Short-stroke cylinders, single-acting (magnetic)

HANSA FLEX

Свойства

| | |
|-----------------------------|---|
| Течности | Filtered compressed air, lubricated (ensure continuity) or unlubricated |
| Работно налягане | макс. 10 bar |
| налягане на задействане | 0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80) |
| Температурен диапазон | -10 °C to +80 °C |
| бутална щанга | C45 steel, hard chrome-plated |
| тръба | Aluminium alloy, anodised |
| диаметър на главата | Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium |
| бутало | Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/PTFE |
| уплътнение за бутални щанги | NBR (additional charge for PU and FKM) |
| уплътнение за бутала | NBR (additional charge for PU and FKM) |

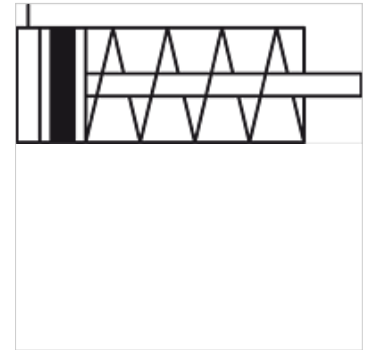

Указание

Други данни при запитване.

Описание

Suitable for installation in limited spaces, with magnet.

Допълнителна информация

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

Артикул

| Обозначение | Ø бутало | Такт (mm) | Съединение | резба вътрешно бутална щанга |
|----------------|----------|-----------|------------|------------------------------|
| K- 07 15 11 87 | 12 mm | 10 | M 5 | M 3 |
| K- 07 15 11 88 | 12 mm | 25 | M 5 | M 3 |
| K- 07 15 11 89 | 16 mm | 10 | M 5 | M 5 |
| K- 07 15 11 90 | 16 mm | 25 | M 5 | M 5 |
| K- 07 15 11 91 | 20 mm | 10 | M 5 | M 5 |
| K- 07 15 11 92 | 20 mm | 25 | M 5 | M 5 |
| K- 07 15 11 93 | 25 mm | 10 | G 1/8 | M 5 |
| K- 07 15 11 94 | 25 mm | 25 | G 1/8 | M 5 |
| K- 07 15 11 95 | 32 mm | 10 | G 1/8 | M 6 |
| K- 07 15 11 96 | 32 mm | 25 | G 1/8 | M 6 |
| K- 07 15 11 97 | 40 mm | 10 | G 1/8 | M 6 |
| K- 07 15 11 98 | 40 mm | 25 | G 1/8 | M 6 |
| K- 07 15 11 99 | 50 mm | 25 | G 1/8 | M 8 |
| K- 07 15 12 00 | 63 mm | 25 | G 1/8 | M 8 |

Принадлежности

K-MAGNETSENSOREN-REED Reed magnetic sensor (incl. 2.5 m cable)