


# K-KURZH ZYL EINFACHW

Short-stroke cylinders, single-acting (magnetic)

**HANSA FLEX**

## Свойства

|                             |   |
|-----------------------------|---|
| Течности                    | Filtered compressed air, lubricated (ensure continuity) or unlubricated |
| Работно налягане            | макс. 10 bar  |
| налягане на задействане     | 0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80)                        |
| Температурен диапазон       | -10 °C to +80 °C  |
| бутална щанга               | C45 steel, hard chrome-plated   |
| тръба                       | Aluminium alloy, anodised   |
| диаметър на главата         | Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium                      |
| бутало                      | Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/PTFE                    |
| уплътнение за бутални щанги | NBR (additional charge for PU and FKM)                                  |
| уплътнение за бутала        | NBR (additional charge for PU and FKM)                                  |

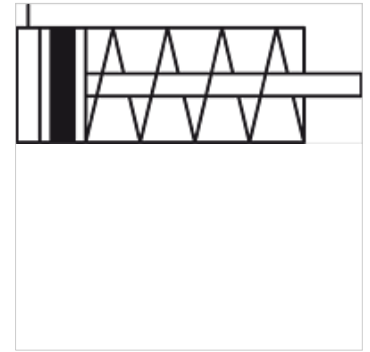

## Указание

Други данни при запитване.

## Описание

Suitable for installation in limited spaces, with magnet.

## Допълнителна информация

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

## Артикул

| Обозначение    | Ø бутало | Такт (mm) | Съединение | резба вътрешно бутална щанга |
|----------------|----------|-----------|------------|------------------------------|
| K- 07 15 11 87 | 12 mm    | 10        | M 5        | M 3                          |
| K- 07 15 11 88 | 12 mm    | 25        | M 5        | M 3                          |
| K- 07 15 11 89 | 16 mm    | 10        | M 5        | M 5                          |
| K- 07 15 11 90 | 16 mm    | 25        | M 5        | M 5                          |
| K- 07 15 11 91 | 20 mm    | 10        | M 5        | M 5                          |
| K- 07 15 11 92 | 20 mm    | 25        | M 5        | M 5                          |
| K- 07 15 11 93 | 25 mm    | 10        | G 1/8      | M 5                          |
| K- 07 15 11 94 | 25 mm    | 25        | G 1/8      | M 5                          |
| K- 07 15 11 95 | 32 mm    | 10        | G 1/8      | M 6                          |
| K- 07 15 11 96 | 32 mm    | 25        | G 1/8      | M 6                          |
| K- 07 15 11 97 | 40 mm    | 10        | G 1/8      | M 6                          |
| K- 07 15 11 98 | 40 mm    | 25        | G 1/8      | M 6                          |
| K- 07 15 11 99 | 50 mm    | 25        | G 1/8      | M 8                          |
| K- 07 15 12 00 | 63 mm    | 25        | G 1/8      | M 8                          |

## Принадлежности

K-MAGNETSENSOREN-REED Reed magnetic sensor (incl. 2.5 m cable)