
K-STOPPVENTILE STECK

Stop valves, ports 2 and 3 with plug connection

Свойства

работно налягане	Max. 10 bar
налягане на управление	1 - 5 bar, depending on operating pressure
температура на средата	max. 70 °C
Монтажно положение	Any. Ring pieces can still be rotated 360° after the valve has been tightened
уплътняващ материал	Perbunan



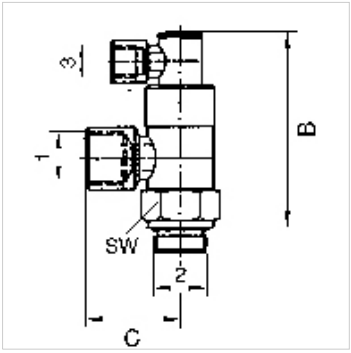

Указание

Други данни при запитване.

Описание

For high-speed positioning and stop functions as well as emergency switching (e.g. emergency stop). If a control signal is present at port 3, air can flow to and from the cylinder. If no control signal is present, the air flow to and from the cylinder is shut off, causing the cylinder to stop in the required position. Stop valves are screwed directly onto the cylinder instead of the normal pipe connections.

Артикул

Обозначение	Port 1	Port 2	Съединение 3	Материал	B (mm)	C (mm)
K- 07 15 20 50	G 1/8	6 mm	4 mm	Nickel-plated brass	52,0	25,0
K- 07 15 20 49	G 1/4	6 mm	4 mm	Nickel-plated brass	58,0	28,0
K- 07 15 20 51	G 3/8	8 mm	4 mm	Nickel-plated brass	63,0	32,0
K- 07 15 20 48	G 1/2	12 mm	4 mm	Nickel-plated brass	72,0	41,0

Въпреки най-старателната проверка не са изключени грешки и ние не поемаме гаранция за съдържащите се данни.