



# K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

**HANSA FLEX**

## Свойства

|                       |                  |
|-----------------------|------------------|
| Температурен диапазон | -20 °C to +60 °C |
| налягане              | Max. 12 bar      |
| диапазон на налягане  | Max. 12 bar      |
| температура           | -20 °C to +60 °C |
| протичане             | 0 - 400 l/min    |
| пружина               | Stainless-steel  |
| корпус                | Brass            |

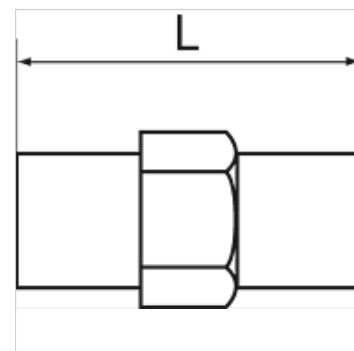

## Указание

Други данни при запитване.

## Описание

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

## Артикул

| Обозначение    | Резба            | работно налягане предварително настроено | L (mm) |
|----------------|------------------|--|--------|
| K- 07 25 03 03 | G 1/4 außen/male | 2 bar                                    | 24,0   |
| K- 07 25 03 04 | G 1/4 außen/male | 4 bar                                    | 24,0   |
| K- 07 25 03 05 | G 1/4 außen/male | 6 bar                                    | 24,0   |