


K-INLINE-DRG IG WASSER O SEKUNDAER

Inline pressure regulators, for water applications

HANSA FLEX

Свойства

| | |
|-----------------------|--|
| Работно налягане | макс. 10 bar |
| Температурен диапазон | 0 °C to +60 °C |
| протичане | 4000 ml/min with 0.8 bar pressure loss |
| корпус | Nickel-plated brass |
| останалите части | CR, stainless steel |

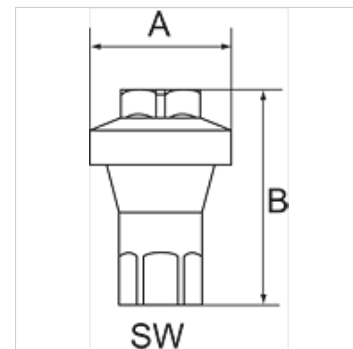

Указание

Други данни при запитване.

Описание

This water regulator is designed as a single-acting diaphragm regulator for installation in any water pipe system. It supplies a precise output value regardless of the input pressure. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. The regulator protects all downstream devices and components in the water pipe by maintaining a required constant pressure and preventing system pressure fluctuations. In combination with a nozzle, it is ideally suited for cooling or cleaning with water spray or mist.

Артикул

| Обозначение | Резба | работно налягане предварително настроено | A (mm) | B | SW (mm) |
|----------------|-------|--|-----------|---------|------------|
| K- 07 25 03 06 | G 1/4 | 1 bar | 34,0 | 51,0 mm | 17 |
| K- 07 25 03 07 | G 1/4 | 2 bar | 34,0 | 51,0 mm | 17 |
| K- 07 25 03 08 | G 1/4 | 3 bar | 34,0 | 51,0 mm | 17 |
| K- 07 25 03 09 | G 1/4 | 4 bar | 34,0 | 51,0 mm | 17 |