



# K-WTST SAFETY BK SCHA AN DR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator

**HANSA FLEX**

## Свойства

|                                      |                                                                   |
|--------------------------------------|-------------------------------------------------------------------|
| входящо налягане                     | 2.5 - 16 bar                                                      |
| изходящо налягане                    | 0.5 - 8 bar                                                       |
| Температурен диапазон                | -10 °C to +50 °C                                                  |
| Течности                             | въздух под налягане                                               |
| уплътняващ материал                  | NBR                                                               |
| присъединителна резба                | Material: Die-cast zinc                                           |
| резервоар                            | Polycarbonate (with bayonet lock) and bowl guard                  |
| филтриращ елемент                    | Cellpor (PE) 5 µm                                                 |
| корпус                               | Material: Grivory® (PA 66)                                        |
| мембрана                             | NBR                                                               |
| разход на собствен въздух            | Max. 1.5 l/min (depending on secondary pressure)                  |
| измерване на стойността на протичане | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| съед. обезв. сферичен кран           | Silencer                                                          |

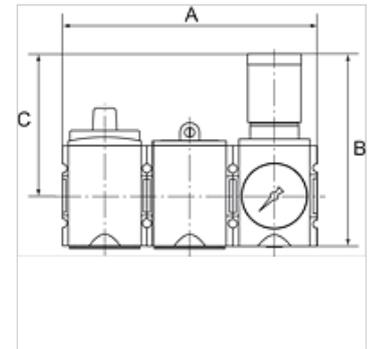

## Указание

Други данни при запитване.

## Описание

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Указания за поръчка

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Артикул

| Обозначение    | Резба | диапазон на регулиране | протичане (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|------------------------|-------------------|--------|----------|--------|
| K- 07 25 15 20 | G 1/4 | 2.5 - 8 bar            | 2000              | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 21 | G 3/8 | 2.5 - 8 bar            | 2000              | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 22 | G 3/8 | 2.5 - 8 bar            | 4300              | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 23 | G 1/2 | 2.5 - 8 bar            | 4300              | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 24 | G 3/4 | 2.5 - 8 bar            | 10000             | 255,0  | 191,0 mm | 137,0  |
| K- 07 25 15 25 | G 1   | 2.5 - 8 bar            | 10000             | 255,0  | 191,0 mm | 137,0  |

## Принадлежности

|                    |          |
|--------------------|----------|
| K-STECKSCHLOSS     | Key lock |
| K-VORHAENGESCHLOSS | Padlock  |