

# K-T-VB PP

Union tees

**HANSA FLEX**


## Свойства

работно налягане on request

работна температура Max. +20 °C

Материал Polypropylene (PP)

уплътняващ материал NBR

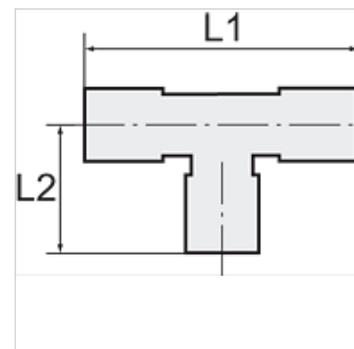

## Указание

Други данни при запитване.

## Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Артикул

Обозначение	за външен Ø на маркуча	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7