
K-T-RED VERBINDER POM

Union tees, unequal

Свойства

работно налягане	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
работна температура	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Материал	Acetalpolymerisat (POM)
уплътняващ материал	NBR



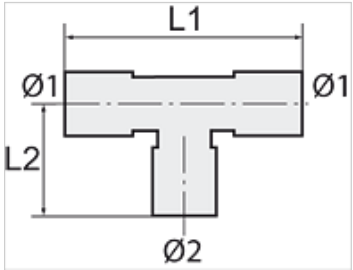

Указание

Други данни при запитване.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

Обозначение	за външно Ø1 на маркуч (mm)	за външно Ø2 на маркуч (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

Въпреки най-старателната проверка не са изключени грешки и ние не поемаме гаранция за съдържащите се данни.