

K-DRV 2

Unidirectional flow control valves

Свойства



Работно налягане макс. 10 bar

работна температура 0 °C to +150 °C

уплътняващ материал FKM

корпус Stainless steel 1.4404

вътрешни части Stainless steel 1.4404

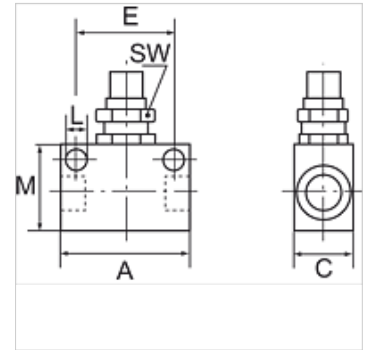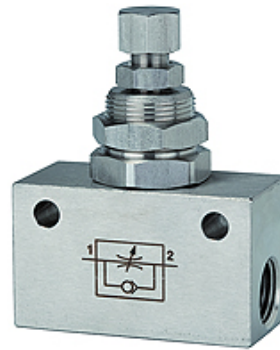

Указание

Други данни при запитване.

Описание

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Артикул

Обозначение	Резба	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22