

K-T-VB VA

Union tees, stainless steel

Свойства

диапазон на налягане	Max. 25 bar
препоръчителни маркучи	PTFE hose
Температурен диапазон	-40 °C to +200 °C (depending on the hose quality and diameter)
Материал	благородна стомана 1.4404
уплътнение	Pure metal



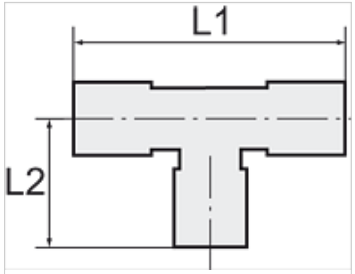

Указание

Други данни при запитване.

Описание

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

Артикул

Обозначение	за маркуч	L1 (mm)	L2 (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 30 46	6 mm / 4 mm	46,0	22,5	12	10
K- 07 40 30 47	8 mm / 6 mm	46,0	23,0	14	10
K- 07 40 30 45	10 mm / 8 mm	52,0	26,0	16	12

Въпреки най-старателната проверка не са изключени грешки и ние не поемаме гаранция за съдържащите се данни.