
K-RD NIPPEL AGRK IGR MS NI

Reducing nipples, conical male thread, parallel female thread - nickel-plated brass

Свойства

работна температура	Max. 150 °C
налягане	Max. 60 bar
Материал	месинг никелиран



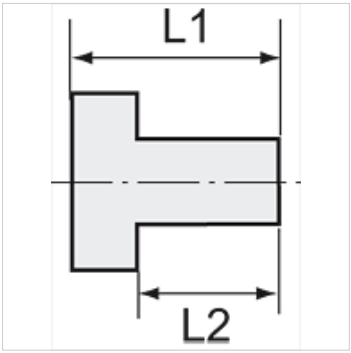

Указание

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Други данни при запитване.

Описание

Suitable for air, water, oil, steam, etc.

Допълнителна информация

Further types and dimensions on request.

Артикул

Обозначение	резба външно	резба вътрешно	L1 (mm)	L2 (mm)	SW
K- 07 40 15 66	R 1/4	G 1/8	16,0	11,0	14 mm
K- 07 40 15 67	R 3/8	G 1/8	17,0	11,5	17 mm
K- 07 40 15 68	R 3/8	G 1/4	17,0	11,5	17 mm
K- 07 40 15 69	R 1/2	G 1/8	19,5	14,0	22 mm
K- 07 40 15 70	R 1/2	G 1/4	20,0	14,0	22 mm
K- 07 40 15 71	R 1/2	G 3/8	20,0	14,0	22 mm
K- 07 40 15 72	R 3/4	G 3/8	23,0	16,5	27 mm
K- 07 40 15 73	R 3/4	G 1/2	23,0	16,5	27 mm
K- 07 40 15 74	R 1	G 1/2	25,0	16,0	34 mm
K- 07 40 15 75	R 1	G 3/4	25,0	18,0	34 mm

Въпреки най-старателната проверка не са изключени грешки и ние не поемаме гаранция за съдържащите се данни.