


K-DICHTRING PVC

Captive seals, PVC, max. temperature 70 °C

HANSA FLEX

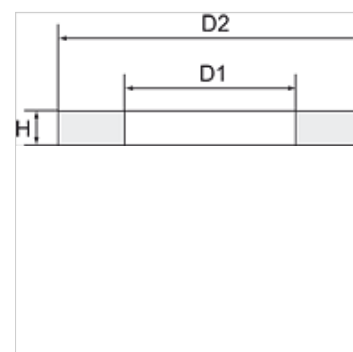

Указание

Други данни при запитване.

Указания за поръчка

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Артикул

Обозначение	за резба	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 03 23	M 5	5,0	8,0	1,2
K- 07 10 03 27	G 1/2	21,0	25,4	2,0
K- 07 10 03 25	G 1/4	13,1	17,9	1,8
K- 07 10 03 26	G 3/8	16,8	21,4	1,8
K- 07 10 03 29	G 1	33,4	40,0	2,0
K- 07 10 03 28	G 3/4	26,6	32,0	2,0
K- 07 10 03 24	G 1/8	9,9	13,9	1,8