


K-DRV ABLD RAENDEL DREH OR

Unidirectional flow control valves with outgoing air restriction, adjustable with knurled screw, angled, swivel type, parallel male thread with O-ring

HANSA FLEX

Свойства

| | |
|------------------------|--|
| работно налягане | Max. 15 bar, coarse vacuum |
| Диапазон на използване | Air, vacuum |
| препоръчителни маркучи | PU or PA (nylon) |
| Течности | Compressed air and all gases or liquids that are compatible with the materials |
| Температурен диапазон | -20 °C to +80 °C |
| уплътняваща повърхност | Parallel version: O-ring in housing, Conical version: thread coating |
| Материал | Plastic, Nickel plated brass |
| притискащ пръстен | Plastic |

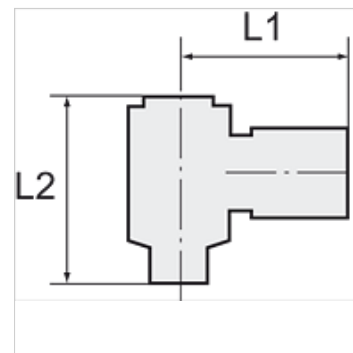

Указание

Други данни при запитване.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

| Обозначение | Резба | за външен Ø на маркуча | L1 (mm) | L2 мин (mm) | L2 макс (mm) | SW |
|----------------|-------|------------------------|---------|-------------|--------------|-------|
| K- 07 40 07 56 | M 5 | 4 mm | 20,0 | 29,0 | 31,9 | 8 mm |
| K- 07 40 07 57 | M 5 | 6 mm | 21,7 | 29,0 | 31,9 | 8 mm |
| K- 07 40 07 67 | G 1/8 | 4 mm | 22,3 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 68 | G 1/8 | 6 mm | 22,9 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 69 | G 1/8 | 8 mm | 25,3 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 66 | G 1/8 | 10 mm | 30,1 | 37,8 | 44,0 | 10 mm |
| K- 07 40 07 63 | G 1/4 | 4 mm | 24,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 64 | G 1/4 | 6 mm | 24,9 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 65 | G 1/4 | 8 mm | 28,4 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 61 | G 1/4 | 10 mm | 32,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 62 | G 1/4 | 12 mm | 32,0 | 44,0 | 51,0 | 14 mm |
| K- 07 40 07 72 | G 3/8 | 8 mm | 29,3 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 70 | G 3/8 | 10 mm | 32,5 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 71 | G 3/8 | 12 mm | 35,3 | 48,7 | 55,0 | 19 mm |
| K- 07 40 07 60 | G 1/2 | 8 mm | 32,3 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 58 | G 1/2 | 10 mm | 35,5 | 53,0 | 59,2 | 24 mm |
| K- 07 40 07 59 | G 1/2 | 12 mm | 36,3 | 53,0 | 59,2 | 24 mm |