


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Свойства

входящо налягане	Max. 10 bar
Температурен диапазон	-10 °C to +50 °C
Течности	въздух под налягане
вид защита	IP 65
работно налягане	0.5 - 8 bar
бутонен прекъсвач	Changeover contact
ширина на порите във филтриращия елемент	20 µm
измерване на стойността на протичане	At 6,3 bar and $\Delta p = 1$ bar

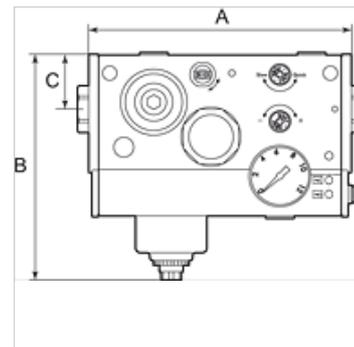

## Указание

Други данни при запитване.

## Описание

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Указания за поръчка

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Артикул

Обозначение	Съединение	протичане (L/min)	A (mm)	B	C (mm)	Напрежение
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)