

K-VSTO POM
Plugs

Свойства

работно налягане	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
работна температура	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Материал	Acetalpolymerisat (POM)
уплътняващ материал	NBR



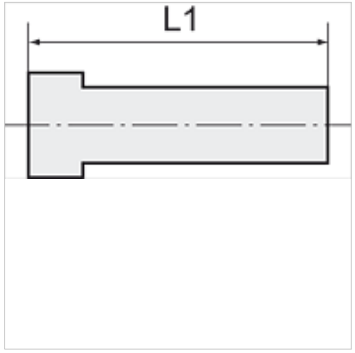

Указание

Други данни при запитване.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

Обозначение	Цвят	L1 (mm)	щуцер (mm)
K- 07 40 29 11	червен	28,0	4
K- 07 40 29 12	червен	28,0	5
K- 07 40 29 13	червен	30,0	6
K- 07 40 29 14	червен	31,0	8
K- 07 40 29 15	червен	36,5	10
K- 07 40 29 16	червен	38,5	12
K- 07 40 29 17	черен	45,0	15
K- 07 40 29 18	черен	41,5	18
K- 07 40 29 19	черен	45,0	22
K- 07 40 29 20	черен	56,0	28

Въпреки най-старателната проверка не са изключени грешки и ние не поемаме гаранция за съдържащите се данни.