

K-RD STUECKE PP

Reducers

HANSA FLEX


Свойства

работно налягане on request

работна температура Max. +20 °C

Материал Polypropylene (PP)

уплътняващ материал NBR

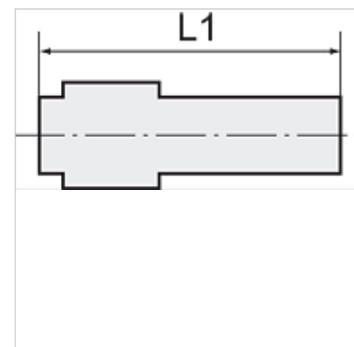

Указание

Други данни при запитване.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

| Обозначение | за външен Ø на маркуча | L1 (mm) | щуцер (mm) |
|----------------|------------------------|------------|---------------|
| K- 07 40 29 00 | 22 mm | 127,0 | 32 |
| K- 07 40 29 01 | 28 mm | 133,3 | 32 |