


K-S-BKR M ENTL-BOHR ABSCHL

Safety ball valves, lockable, with relief port

HANSA FLEX

Свойства

| | |
|----------------------------------|--|
| работна температура | -10 °C to + 100 °C (depending on operating pressure) |
| резбови отвор за обезвъздушаване | M 5 (>1": Relief port G 1/4") |
| резба описание | Rp thread acc. to EN 10226 |
| корпус | Nickel-plated brass |
| ръчен лост | Steel - PVC coated |
| сачма | hardchrome-plated brass |
| сферично уплътнение | PTFE |
| уплътнение на шпindel | PTFE |

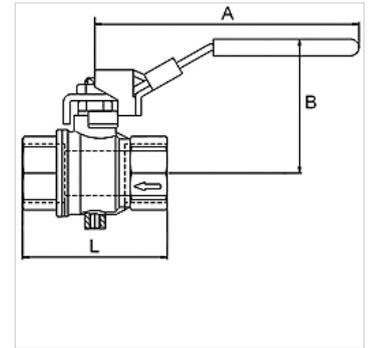

Указание

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

Други данни при запитване.

Описание

2/2-way safety ball valves, two parts, made of nickel-plated brass. Specially designed for pneumatic applications. The valve shuts off the supply line and bleeds the application area. Lockable hand lever in closed position.

Допълнителна информация

The price does not include a padlock. Please order separately.

Артикул

| Обозначение | DN | Резба | PN (bar) | A (mm) | B (mm) | L (mm) |
|----------------|----|----------|----------|--------|--------|--------|
| K- 07 30 29 29 | 8 | Rp 1/4 | 14 | 96,0 | 49,0 | 45,0 |
| K- 07 30 29 30 | 10 | Rp 3/8 | 14 | 96,0 | 49,0 | 45,0 |
| K- 07 30 29 31 | 15 | Rp 1/2 | 14 | 96,0 | 51,0 | 59,0 |
| K- 07 30 29 32 | 20 | Rp 3/4 | 14 | 117,0 | 60,0 | 64,0 |
| K- 07 30 29 33 | 25 | Rp 1 | 14 | 117,0 | 64,0 | 81,0 |
| K- 07 30 29 34 | 32 | Rp 1 1/4 | 14 | 157,0 | 80,0 | 93,0 |
| K- 07 30 29 35 | 40 | Rp 1 1/2 | 14 | 157,0 | 86,0 | 102,0 |
| K- 07 30 29 36 | 50 | Rp 2 | 14 | 157,0 | 93,0 | 121,0 |

Принадлежности

K-VORHAENGESCHLOSS Padlock