


# K-DRV 1

Unidirectional flow control valves

**HANSA FLEX**

## Свойства

|                     |                 |
|---------------------|-----------------|
| Работно налягане    | макс. 10 bar    |
| работна температура | Max. 70 °C      |
| уплътняващ материал | NBR             |
| корпус              | Aluminium       |
| вътрешни части      | Aluminium/Brass |

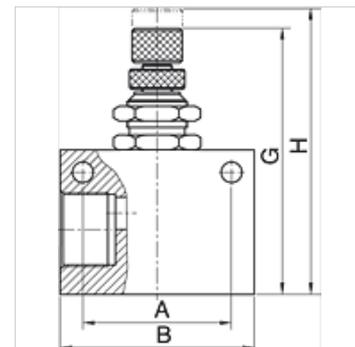

## Указание

Други данни при запитване.

## Артикул

| Обозначение    | Резба | A<br>(mm) | B<br>(mm) | G<br>(mm) | H<br>(mm) |
|----------------|-------|-----------|-----------|-----------|-----------|
| K- 07 30 12 32 | G 1/8 | 22,0      | 32,0      | 46,90     | 52,3      |
| K- 07 30 12 33 | G 1/4 | 26,0      | 36,0      | 50,80     | 56,3      |
| K- 07 30 12 34 | G 3/8 | 35,0      | 50,0      | 65,00     | 74,0      |
| K- 07 30 12 35 | G 1/2 | 35,0      | 50,0      | 65,00     | 74,0      |