



K-ODER-VENTIL

OR valves

HANSA FLEX

Свойства

Работно налягане	2 - 10 bar
Температурен диапазон	-10 °C to +80 °C
протичане при 6,3 бар и Δ 1 бар	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
корпус на клапан	алуминий
сачма	Stainless steel
уплътнения	NBR

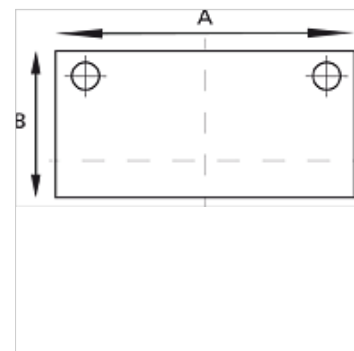

Указание

Други данни при запитване.

Описание

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Артикул

Обозначение	Резба	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0