


# K-T-RED STUTZEN 3 POM

Reducing T push-on connectors, POM

**HANSA FLEX**

## Свойства

Температурен диапазон -40 °C to +90 °C

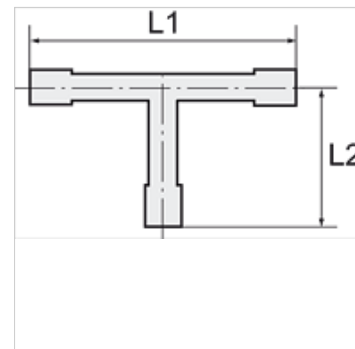

## Указание

Други данни при запитване.

## Описание

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

## Артикул

| Обозначение    | за маркуч                | L1<br>(mm) | L2<br>(mm) | макс. допустимо свръхналягане<br>(bar) |
|----------------|--------------------------|------------|------------|--|
| K- 07 40 46 59 | LW 3 mm / 4 mm / 3 mm    | 25,0       | 17,5       | 10                                     |
| K- 07 40 46 60 | LW 4 mm / 6 mm / 4 mm    | 37,0       | 24,0       | 10                                     |
| K- 07 40 46 61 | LW 6 mm / 4 mm / 6 mm    | 49,0       | 20,5       | 10                                     |
| K- 07 40 46 62 | LW 8 mm / 4 mm / 8 mm    | 56,0       | 22,0       | 10                                     |
| K- 07 40 46 63 | LW 8 mm / 6 mm / 8 mm    | 56,0       | 28,0       | 10                                     |
| K- 07 40 46 64 | LW 10 mm / 6 mm / 10 mm  | 62,0       | 28,0       | 10                                     |
| K- 07 40 46 65 | LW 10 mm / 8 mm / 10 mm  | 62,0       | 31,0       | 10                                     |
| K- 07 40 46 66 | LW 12 mm / 6 mm / 12 mm  | 69,0       | 29,0       | 10                                     |
| K- 07 40 46 67 | LW 12 mm / 8 mm / 12 mm  | 69,0       | 31,0       | 10                                     |
| K- 07 40 46 68 | LW 12 mm / 10 mm / 12 mm | 69,0       | 33,0       | 10                                     |
| K- 07 40 46 69 | LW 18 mm / 10 mm / 18 mm | 79,0       | 36,0       | 10                                     |
| K- 07 40 46 70 | LW 18 mm / 15 mm / 18 mm | 80,0       | 44,0       | 10                                     |