

K-STECKVERBINDU RED

Reducers

Свойства

работно налягане	Max. 16 bar
работна температура	-20 °C to +150 °C
Материал	месинг никелиран
притискащ пръстен	Nickel-plated brass
затягащ пръстен	Stainless steel



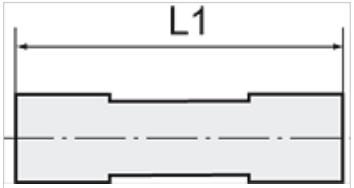

Указание

Други данни при запитване.

Описание

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Артикул

Обозначение	за външен Ø на маркуча	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5

Въпреки най-старателната проверка не са изключени грешки и ние не поемаме гаранция за съдържащите се данни.