
K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

Vlastnosti

Provozní tlak	max. 18 bar
Teplotní rozsah	0 °C to +60 °C
Tolerance tlaku	± 0.3 bar at 10 l/min
Pouzdro	Zinc
ostatní součásti	Brass, NBR, stainless steel



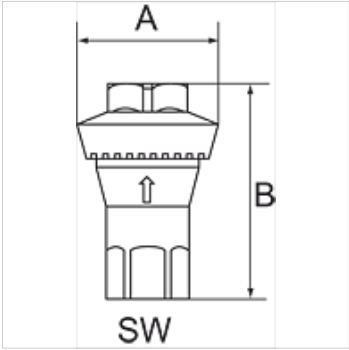

Upozornění

Další údaje na dotaz.

Popis

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

Výrobek

Označení	Závit	Pracovní tlak předem nastaven	A (mm)	B	SW (mm)
K- 07 25 02 75	G 1/4	1 bar	34,0	52,0 mm	17
K- 07 25 02 76	G 1/4	2 bar	34,0	52,0 mm	17
K- 07 25 02 77	G 1/4	3 bar	34,0	52,0 mm	17
K- 07 25 02 78	G 1/4	4 bar	34,0	52,0 mm	17
K- 07 25 02 79	G 1/4	5 bar	34,0	52,0 mm	17
K- 07 25 02 80	G 1/4	6 bar	34,0	52,0 mm	17
K- 07 25 02 81	G 1/4	6,5 bar	34,0	52,0 mm	17
K- 07 25 02 82	G 1/4	7 bar	34,0	52,0 mm	17

Navzdory nejpečlivější kontrole nemůžeme vyloučit chyby a nepřejímáme žádnou záruku za obsažené údaje.