


# K-SCHL-AUFROLLER LUFT

Hose reels for compressed air

**HANSA FLEX**

## Vlastnosti

|                         |  |
|-------------------------|--|
| <b>Materiál hadice</b>  | Braided polyurethane                         |
| <b>Provozní tlak</b>    | Max. 16 bar; 13.5 x 9.5 mm hose: max. 12 bar |
| <b>Provozní teplota</b> | -20 °C to +60 °C                             |
| <b>Úhel natočení</b>    | 300°   |

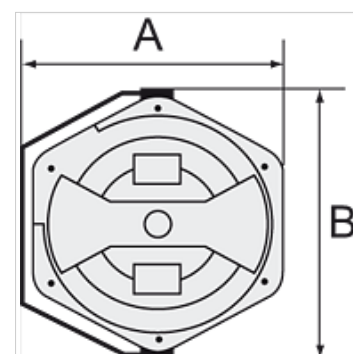

## Upozornění

Další údaje na dotaz.

## Popis

For easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose (not Art. K-07100618).

## Další informace

Housing of K-07100621, K-07100620 and K-07100618 identical to K-07100614

## Výrobek

| Označení       | Rozměr hadice    | A<br>(mm) | B<br>(mm) | Délka hadice<br>(m) |
|----------------|------------------|-----------|-----------|---------------------|
| K- 07 10 06 18 | 12 mm x 8 mm     | 394,5     | 436,0     | 7                   |
| K- 07 10 06 19 | 12 mm x 8 mm     | 361,0     | 390,0     | 10                  |
| K- 07 10 06 20 | 12 mm x 8 mm     | 394,5     | 436,0     | 16                  |
| K- 07 10 06 21 | 13,5 mm x 9,5 mm | 394,5     | 436,0     | 14                  |