

K-GRUNDEJEKTION SBP

Basic ejectors

HANSA FLEX

Vlastnosti

Vlastnosti	Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%) No moving parts, which means no wear and no maintenance Maximum suction capacity with minimum compressed air consumption Minimum size, low weight For decentralised vacuum generation in highly dynamic processes
-------------------	--

Použití	For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries. Also ideal for the construction of ejector blocks for decentralised control of suction pads.
----------------	--


Pouzdro	Plastic (impact-resistant)
----------------	----------------------------

Přípoj	Push-in coupling
---------------	------------------

Provozní tlak	4.5 bar
----------------------	---------

Stupeň odčerpání vzduchu	85 %
---------------------------------	------

Tlumič hluku	Plastic
---------------------	---------

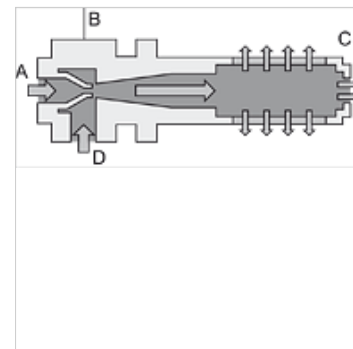

Upozornění

Další údaje na dotaz.

Popis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Výrobek

Označení	Velikost trysky	Připojení stlačeného vzduchu	Podtlakový přípoj	Spotřeba vzduchu při sání (L/min)	Max. sací kapacita (L/min)	Rozměr
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

Příslušenství

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers