


K-GRUNDEJEKTION SBP-C

Basic ejectors »SBP-C« with blow-off valve, with integrated silencer

HANSA FLEX

Vlastnosti

Vlastnosti	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
Použití	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. InConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
Systém trysek	Brass
Přípoj	Push-in coupling
Tlumič hluku	Plastic
Základní tělo	Impact-resistant plastic

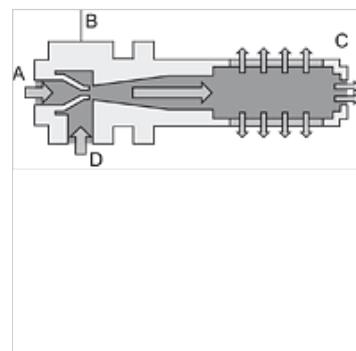

Upozornění

Další údaje na dotaz.

Popis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Výrobek

Označení	Velikost trysky	Klidová poloha sacího ventilu	Připojení stlačeného vzduchu	Podtlakový přípoj	Rozměr
K-07 45 01 19	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K-07 45 01 21	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K-07 45 01 23	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K-07 45 01 25	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Příslušenství

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit