


# K-INLINE-EJEKTOREN SLP

Inline ejectors »SLP«, plug connection

**HANSA FLEX**

## Vlastnosti

<b>Vlastnosti</b>	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption low noise
<b>Použití</b>	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
<b>Pouzdro</b>	plastic (Typ SLP)
<b>Systém trysek</b>	Brass (type VR)
<b>Přípoj</b>	thread connector

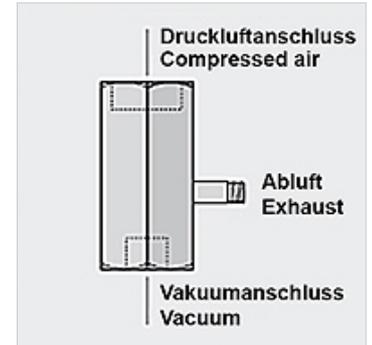

## Upozornění

Další údaje na dotaz.

## Popis

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

## Výrobek

Označení	Velikost trysky	Odvětrávací přípoj	Připojení stlačeného vzduchu	Podtlakový přípoj	Stupeň odčerpání vzduchu	Spotřeba vzduchu při sání (L/min)	Max. sací kapacita (L/min)	Délka (mm)	Provozní tlak (bar)
K- 07 45 01 27	0,5	-	4 mm	4 mm	85 %	13,0	8,0	57,0	4,5
K- 07 45 01 28	0,7	-	4 mm	4 mm	85 %	25,0	16,0	57,0	4,5