

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Vlastnosti

Použití	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Zvláštní charakteristiky	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

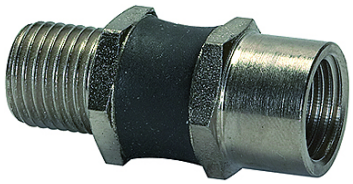

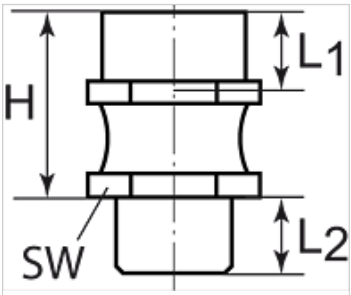

Upozornění

Další údaje na dotaz.

Popis

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Výrobek

Označení	Závit 1 vnitřní	Závit 2 vnější	H (mm)	Materiál	L1 (mm)	L2 (mm)	Úhel W (°)	Vertikální zatížení (N/m2)	Ohybový moment (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Navzdory nejpečlivější kontrole nemůžeme vyloučit chyby a nepřejímáme žádnou záruku za obsažené údaje.