



K-GE AGR-K

Male stud couplings, polyamide, conical male thread acc. to ISO 7-1

HANSA FLEX

Vlastnosti

Teplotní rozsah -40 °C to +90 °C

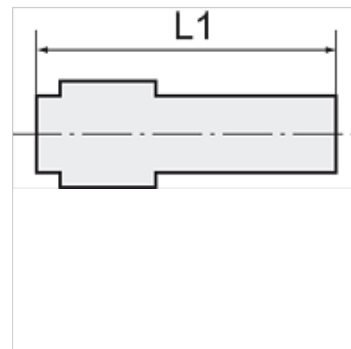

Upozornění

Další údaje na dotaz.

Popis

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

Výrobek

Označení	Závít	pro hadici	L1 (mm)	Max. povolený přetlak (bar)	SW
K- 07 40 16 63	M 5	LW 3 mm	19,5	10	6 mm
K- 07 40 16 64	R 1/8	LW 4 mm	27,0	10	10 mm
K- 07 40 16 65	R 1/8	LW 6 mm	32,5	10	10 mm
K- 07 40 16 66	R 1/8	LW 8 mm	38,0	10	14 mm
K- 07 40 16 67	R 1/4	LW 4 mm	32,0	10	14 mm
K- 07 40 16 68	R 1/4	LW 5 mm	36,0	10	14 mm
K- 07 40 16 69	R 1/4	LW 6 mm	37,5	10	14 mm
K- 07 40 16 70	R 1/4	LW 8 mm	41,0	10	14 mm
K- 07 40 16 71	R 1/4	LW 10 mm	43,5	10	14 mm
K- 07 40 16 72	R 3/8	LW 6 mm	39,0	10	17 mm
K- 07 40 16 73	R 3/8	LW 8 mm	41,0	10	17 mm
K- 07 40 16 74	R 3/8	LW 10 mm	43,5	10	17 mm
K- 07 40 16 75	R 3/8	LW 12 mm	45,5	10	17 mm
K- 07 40 16 76	R 1/2	LW 8 mm	49,0	10	22 mm
K- 07 40 16 77	R 1/2	LW 12 mm	54,0	10	22 mm
K- 07 40 16 78	R 1/2	LW 16 mm	58,0	10	22 mm
K- 07 40 46 50	R 3/4	LW 16 mm	58,0	10	27 mm
K- 07 40 46 51	R 3/4	LW 19 mm	58,0	10	27 mm
K- 07 40 46 52	R 1	LW 25 mm	69,0	10	32 mm