



K-XVR

Male connectors with male G thread

HANSA FLEX

Vlastnosti

Provozní tlak	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Šroubovací tělo	Polyamide (PA)
Svěrací kroužek	Polypropylene (PP)
Matice	Polypropylene (PP)

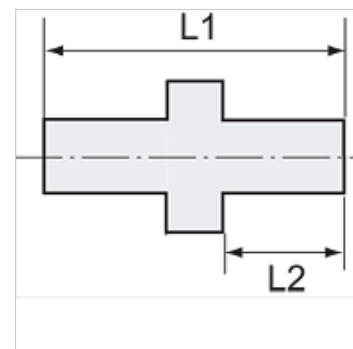

Upozornění

Další údaje na dotaz.

Popis

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Výrobek

Označení	Závit	pro hadici	L1 (mm)	L2 (mm)	SW
K- 07 40 32 30	G 1/8	4 mm / 6 mm	31,5	8,0	14 mm
K- 07 40 32 31	G 1/8	6 mm / 8 mm	36,5	8,0	17 mm
K- 07 40 32 32	G 1/8	8 mm / 10 mm	40,5	8,0	19 mm
K- 07 40 32 33	G 1/8	9 mm / 12 mm	44,5	8,0	22 mm
K- 07 40 32 34	G 1/4	4 mm / 6 mm	37,0	12,0	17 mm
K- 07 40 32 35	G 1/4	6 mm / 8 mm	41,0	12,0	17 mm
K- 07 40 32 36	G 1/4	8 mm / 10 mm	45,0	12,0	19 mm
K- 07 40 32 37	G 1/4	9 mm / 12 mm	48,5	12,0	22 mm
K- 07 40 32 38	G 3/8	4 mm / 6 mm	38,5	12,0	22 mm
K- 07 40 32 39	G 3/8	6 mm / 8 mm	42,5	12,0	22 mm
K- 07 40 32 40	G 3/8	8 mm / 10 mm	45,5	12,0	22 mm
K- 07 40 32 41	G 3/8	9 mm / 12 mm	49,5	12,0	22 mm
K- 07 40 32 42	G 1/2	4 mm / 6 mm	43,0	14,0	27 mm
K- 07 40 32 43	G 1/2	6 mm / 8 mm	47,0	14,0	27 mm
K- 07 40 32 44	G 1/2	8 mm / 10 mm	50,0	14,0	27 mm
K- 07 40 32 45	G 1/2	9 mm / 12 mm	54,0	14,0	27 mm