

K-W90 DERH AG

Male elbows, swivel type, parallel male thread


HANSA FLEX

Vlastnosti

Max. provozní tlak 18 bar

použitelné hadice PA, PE, PU

Materiál poniklovaná mosaz

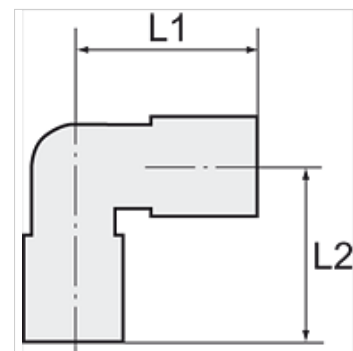

Upozornění

Další údaje na dotaz.

Výrobek

Označení	Závit	pro hadici	L1 (mm)	L2 (mm)	SW
K- 07 40 33 97	G 1/8	6 mm / 4 mm	22,5	22,5	14 mm
K- 07 40 33 98	G 1/8	8 mm / 6 mm	23,5	22,5	14 mm
K- 07 40 33 95	G 1/4	6 mm / 4 mm	23,5	25,0	17 mm
K- 07 40 33 96	G 1/4	8 mm / 6 mm	23,5	25,0	17 mm
K- 07 40 33 94	G 1/4	10 mm / 8 mm	25,5	25,5	17 mm