


# K-W90 DREH AG OR POM

Male elbows, swivel type, parallel male thread with O-ring (M5 - non-swivel type, w/o O-ring)

**HANSA FLEX**

## Vlastnosti

|                  |   |
|------------------|---|
| Pracovní tlak    | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)    |
| Provozní teplota | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Materiál         | Acetalpolymerisat (POM)                           |
| Těsnicí materiál | Nitrilkaučuk                                      |

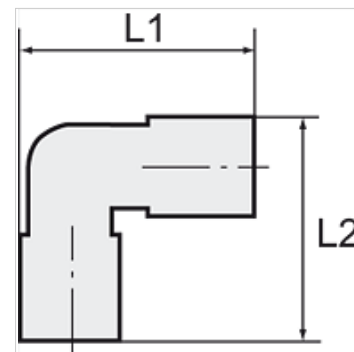

## Upozornění

Další údaje na dotaz.

## Popis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Výrobek

| Označení       | Závit | pro vnější Ø hadice | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|-------|---------------------|------------|------------|-------|
| K- 07 40 28 85 | G 1/8 | 6 mm                | 40,0       | 28,1       | 15 mm |
| K- 07 40 28 86 | G 1/8 | 8 mm                | 45,6       | 31,1       | 17 mm |
| K- 07 40 28 83 | G 1/4 | 6 mm                | 44,1       | 28,1       | 17 mm |
| K- 07 40 28 84 | G 1/4 | 8 mm                | 45,5       | 30,9       | 17 mm |
| K- 07 40 28 82 | G 1/4 | 10 mm               | 50,3       | 36,2       | 20 mm |
| K- 07 40 28 90 | G 3/8 | 8 mm                | 46,5       | 30,9       | 22 mm |
| K- 07 40 28 87 | G 3/8 | 10 mm               | 53,3       | 35,7       | 22 mm |
| K- 07 40 28 88 | G 3/8 | 12 mm               | 60,4       | 45,0       | 24 mm |
| K- 07 40 28 89 | G 3/8 | 15 mm               | 79,8       | 51,4       | 22 mm |
| K- 07 40 28 78 | G 1/2 | 10 mm               | 54,8       | 36,2       | 27 mm |
| K- 07 40 28 79 | G 1/2 | 12 mm               | 63,6       | 45,5       | 27 mm |
| K- 07 40 28 80 | G 1/2 | 15 mm               | 80,0       | 50,6       | 27 mm |
| K- 07 40 28 81 | G 1/2 | 18 mm               | 91,5       | 59,7       | 27 mm |