



K-XVM ZYL 2

Male connectors, parallel male thread

HANSA FLEX

Vlastnosti

Max. provozní tlak	18 bar
použitelné hadice	PA, PE, PU
Materiál	poniklovaná mosaz

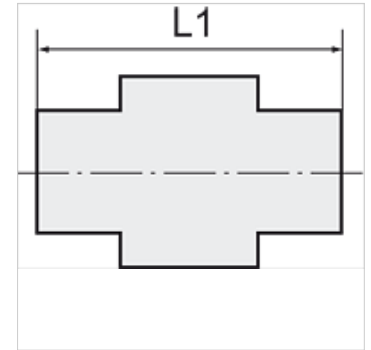

Upozornění

Další údaje na dotaz.

Výrobek

Označení	Závit	pro hadici	L1 (mm)	SW
K- 07 40 33 54	M 5	5 mm / 3 mm	21,0	8 mm
K- 07 40 33 55	M 5	6 mm / 4 mm	21,0	8 mm
K- 07 40 33 60	G 1/8	5 mm / 3 mm	23,0	14 mm
K- 07 40 33 61	G 1/8	6 mm / 4 mm	25,5	13 mm
K- 07 40 33 62	G 1/8	8 mm / 6 mm	25,5	14 mm
K- 07 40 33 59	G 1/8	10 mm / 8 mm	27,5	14 mm
K- 07 40 33 57	G 1/4	6 mm / 4 mm	28,0	16 mm
K- 07 40 33 58	G 1/4	8 mm / 6 mm	28,0	16 mm
K- 07 40 33 56	G 1/4	10 mm / 8 mm	29,5	16 mm
K- 07 40 33 65	G 3/8	6 mm / 4 mm	29,0	19 mm
K- 07 40 33 66	G 3/8	8 mm / 6 mm	29,0	19 mm
K- 07 40 33 63	G 3/8	10 mm / 8 mm	30,5	19 mm
K- 07 40 33 64	G 3/8	12 mm / 10 mm	32,0	19 mm