


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Vlastnosti

Tlak na vstupu	Max. 30 bar
Teplota média	max. 130 °C
Teplota okolí	Max. 60 °C
Průtok	2500 l/min
Šířka póru ve filtrační vložce	50 µm
Těsnicí materiál	FKM
Membrána	PTFE on NBR base
Materiál	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Měření hodnoty průtoku	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

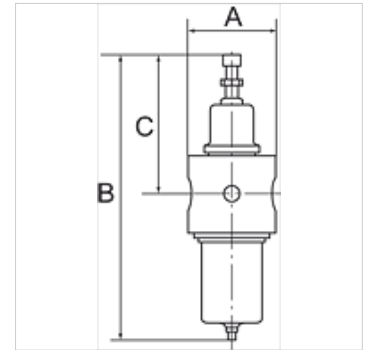

Upozornění

Další údaje na dotaz.

Popis

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Upozornění k objednávkám

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Výrobek

Označení	Závít	Regulační rozsah	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Náhradní díly

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts