


# K-WTEH 2-TLG MET M ABLV TRO STANDARD

Service units with metal bowl and manual drain valve, metal sight dome

**HANSA FLEX**

## Vlastnosti

|                                       |  |
|---------------------------------------|--|
| <b>Tlak na vstupu</b>                 | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl)    |
| <b>Regulační rozsah</b>               | 0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl) |
| <b>Teplota média</b>                  | max. 60 °C   |
| <b>Teplota okolí</b>                  | Max. 60 °C   |
| <b>Šířka póru ve filtrační vložce</b> | 5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4)                            |
| <b>Těsnicí materiál</b>               | Nitrilkaučuk   |
| <b>Pouzdro</b>                        | Die-cast zinc / Aluminium, painted silver                                  |
| <b>Odkapávací nástavec</b>            | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                       |
| <b>Měření hodnoty průtoku</b>         | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar             |

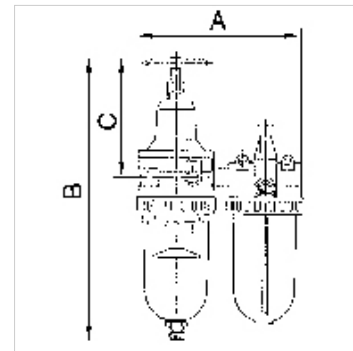

## Upozornění

Další údaje na dotaz.

## Popis

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

## Výrobek

| Označení       | Závit | Průtok (L/min) | A (mm) | B        | C (mm) | DN | Ø manometru |
|----------------|-------|----------------|--------|----------|--------|----|-------------|
| K- 07 25 14 94 | G 1/4 | 600            | 117,0  | 240,0 mm | 106,5  | 6  | 50          |
| K- 07 25 14 97 | G 3/8 | 600            | 117,0  | 240,0 mm | 106,5  | 6  | 50          |
| K- 07 25 15 00 | G 3/8 | 800            | 150,0  | 281,5 mm | 120,5  | 10 | 63          |
| K- 07 25 15 03 | G 1/2 | 2100           | 175,0  | 302,0 mm | 130,0  | 15 | 63          |
| K- 07 25 15 06 | G 3/4 | 4000           | 220,0  | 454,6 mm | 190,6  | 20 | 63          |
| K- 07 25 15 09 | G 1   | 4000           | 220,0  | 454,6 mm | 190,6  | 25 | 63          |

## Náhradní díly

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD   | Holder  |
| K-SCHUTZKORB G             | Protective cage   |
| K-VERSCHLEI-SATZ           | Set of wearing parts                                      |
| K-FILTERELEMENT            | Filter element  |
| K-TROPFAUFSATZ POLYCARBO   | Drip attachment polycarbonate                             |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-RD NIPPEL MS NI          | Reducing nipples - nickel-plated brass                    |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-TROPFAUFSATZ METALL      | Drip attachment metal                                     |
| K-ABLASSVENTIL AUTO        | Fully-automatic drain valve with Adapter G 1/8            |
| K-AUTOMAT ABLASSVENTIL     | Automatic drain valve                                     |