

# K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

**HANSA FLEX**

## Vlastnosti

Teplotní rozsah -20 °C to +60 °C

Tlak Max. 12 bar


Rozmezí tlaku Max. 12 bar

Teplota -20 °C to +60 °C

Průtok 0 - 400 l/min

Pružina Stainless-steel

Pouzdro Brass

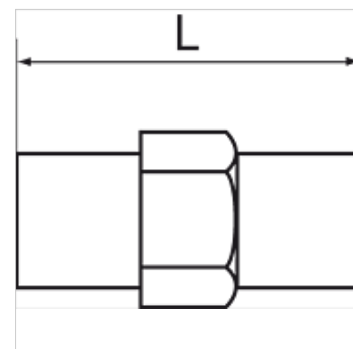

## Upozornění

Další údaje na dotaz.

## Popis

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

## Výrobek

Označení	Závit	Pracovní tlak předem nastaven	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0