

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Vlastnosti

Teplotní rozsah -20 °C to +60 °C

Tlak Max. 12 bar


Rozmezí tlaku Max. 12 bar

Teplota -20 °C to +60 °C

Průtok 0 - 400 l/min

Pružina Stainless-steel

Pouzdro Brass

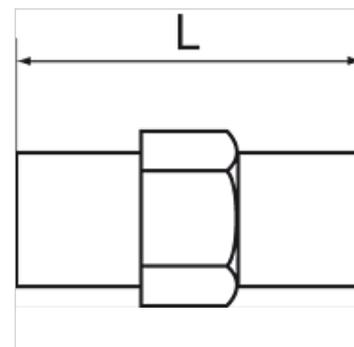

Upozornění

Další údaje na dotaz.

Popis

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Výrobek

Označení	Závít	Pracovní tlak předem nastaven	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0