


# K-INLINE-DRG IG WASSER O SEKUNDAER

Inline pressure regulators, for water applications

**HANSA FLEX**

## Vlastnosti

|                  |  |
|------------------|--|
| Provozní tlak    | max. 10 bar                            |
| Teplotní rozsah  | 0 °C to +60 °C                         |
| Průtok           | 4000 ml/min with 0.8 bar pressure loss |
| Pouzdro          | Nickel-plated brass                    |
| ostatní součásti | CR, stainless steel                    |

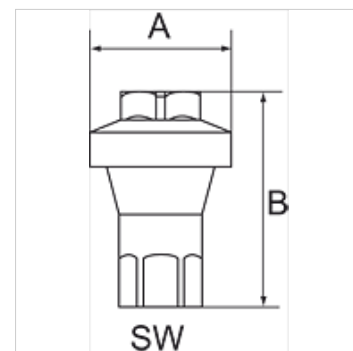

## Upozornění

Další údaje na dotaz.

## Popis

This water regulator is designed as a single-acting diaphragm regulator for installation in any water pipe system. It supplies a precise output value regardless of the input pressure. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. The regulator protects all downstream devices and components in the water pipe by maintaining a required constant pressure and preventing system pressure fluctuations. In combination with a nozzle, it is ideally suited for cooling or cleaning with water spray or mist.

## Výrobek

| Označení       | Závit | Pracovní tlak předem nastaven | A<br>(mm) | B       | SW<br>(mm) |
|----------------|-------|-------------------------------|-----------|---------|------------|
| K- 07 25 03 06 | G 1/4 | 1 bar                         | 34,0      | 51,0 mm | 17         |
| K- 07 25 03 07 | G 1/4 | 2 bar                         | 34,0      | 51,0 mm | 17         |
| K- 07 25 03 08 | G 1/4 | 3 bar                         | 34,0      | 51,0 mm | 17         |
| K- 07 25 03 09 | G 1/4 | 4 bar                         | 34,0      | 51,0 mm | 17         |